

FOLD & ROLL™ SIGN SYSTEM

The Fold & Roll™ sign system - a smart choice for work zone safety. Fold & Roll utilizes a fold-up/roll-up design for compact storage, making it easy to store and transport to and from the work zone. The need for separate storage locations for stand and panel is eliminated. The kick release legs and snap-in hub mechanisms allow for quick, hassle free set-up. Quick and easy set up allows crews to be more productive and safer.


FEATURES:

- ▶ **NCHRP-350 compatibility** - crash test results available.
- ▶ Complies with MUTCD standards.
- ▶ Compact storage configuration and easy set up.
- ▶ Utilizes kick release system for quick leg deployment.
- ▶ Available with various sign legends - identifying stamp is featured on top of hub for quick identification in storage mode.
- ▶ Displays 36" and 48" reflective signs (shown at right with 48" sign).
- ▶ All aluminum and steel construction.
- ▶ Dual torsion spring system - a proven wind relieving mechanism.
- ▶ Features double or triple flag holder.
- ▶ Telescoping aluminum legs with two-position height adjustment.



*Total height of storage mode: 45" (1143 mm).
Storage height of stand only: 30" (762 mm).
Storage height of panel only: 33" (838 mm).*

Shown here: DF3003S sign stand and 3000XP-48 sign panel.

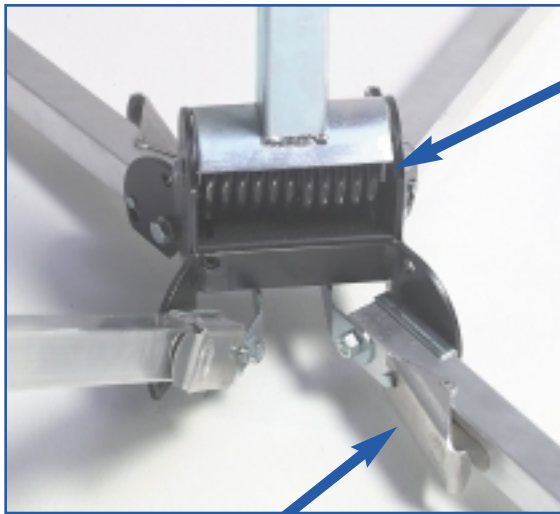

Kick release system minimizes amount of time spent exposed to nearby traffic. Legs are easily deployed with foot or gloved hand. Leg locks into position when fully extended.

Stand incorporates a spring design, allowing it to flex under wind force or upon impact. Stand remains in place under winds up to 65 mph.



Leg extension with anti-skid foot pad. Full extension length: 51" (1295 mm). Open footprint: 92" x 57½" (2337 mm X 1461 mm).

Fold & Roll™ sign system is available as two separate units, DF3003S sign stand and 3000XP-48 sign panel can be purchased separately.

FOLD & ROLL™

1



Using the kick release, quickly lock legs into place. Leg releases can be easily operated by foot or gloved hand.

2



Unwrap velcro strap and pull vertical support arm upward, lock into place.



Self-locking center hub creates a secure support for sign panel.

3



Lock in horizontal supports and sign is ready for display.



Wind relieving steel spring allows the stand to give with wind force or upon vehicle impact.

- ▶ Height from ground to top of panel: 80" (2032 mm).
- ▶ Height from ground to top of flags: 103" (2616 mm).
- ▶ Total time needed to deploy stand and sign panel: 20 seconds.



DICKE TOOL COMPANY
1201 WARREN AVE. - P.O. Box 518 - DOWNERS GROVE, IL 60515
PH: 630-969-0050 - FAX: 630-969-3973
WWW.DICKETOOL.COM