

DYNAFLEX™ 4503 SIGN STAND

- MODEL NUMBER DF4503



DYNAFLEX™ 4503

FEATURES:

- ▶ **NCHRP-350 compatibility** - crash test results available.
- ▶ Complies with MUTCD standards.
- ▶ Displays 36" and 48" roll-up sign panels five (5) feet off the ground.
- ▶ Fast and easy deployment with the kick release system. Legs lock into position when fully extended and adjust for uneven terrain.
- ▶ Lightweight aluminum tubing legs and mast, all steel components coated to reduce corrosion.
- ▶ Open footprint - full leg extension: 72" x 117" (1829 mm x 2972 mm)
- ▶ Leg length: 49 1/2" (1257 mm); Leg extended: 65" (1651 mm)
- ▶ Telescoping aluminum legs with two position height adjustment and anti-skid foot pads.
- ▶ Holds up to three flags.




Storage height: 60" (1524 mm)
Weight: 37 lbs.



Spring design allows stand to flex under wind force or upon impact.

Kick release mechanism - legs are quickly deployed with a shoe or gloved hand.

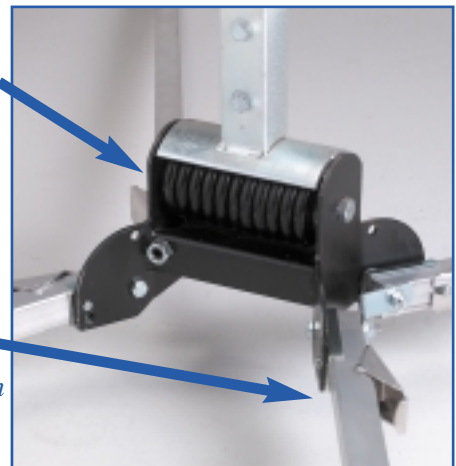

DICKE SAFETY PRODUCTS
1201 WARREN AVE. - P.O. BOX 518 - DOWNERS GROVE, IL 60515
PH: 630-969-0050 - FAX: 630-969-3973
WWW.DICKETOOL.COM





DYNAFLEX™ 4700TX SIGN STAND

- MODEL NUMBER DF4700TX


FEATURES:

- ▶ **NCHRP-350 compatibility** - crash test results available.
- ▶ Complies with MUTCD standards.
- ▶ Compact storage design with kick release system for easy leg deployment and dual leg setting to adjust to uneven terrain.
- ▶ Displays 36" and 48" roll-up sign panels.
- ▶ Lightweight corrosion-resistant aluminum tubing legs and mast, all steel components coated to reduce corrosion.
- ▶ Open footprint: 82" x 128" (2082 mm x 3251 mm)
- ▶ Leg length: 72" (1829 mm)



Incorporates spring design. Dual torsion spring system absorbs winds and vehicle gusts without toppling.

*Storage height: 85" (2159 mm)
Weight: 42 lbs.*

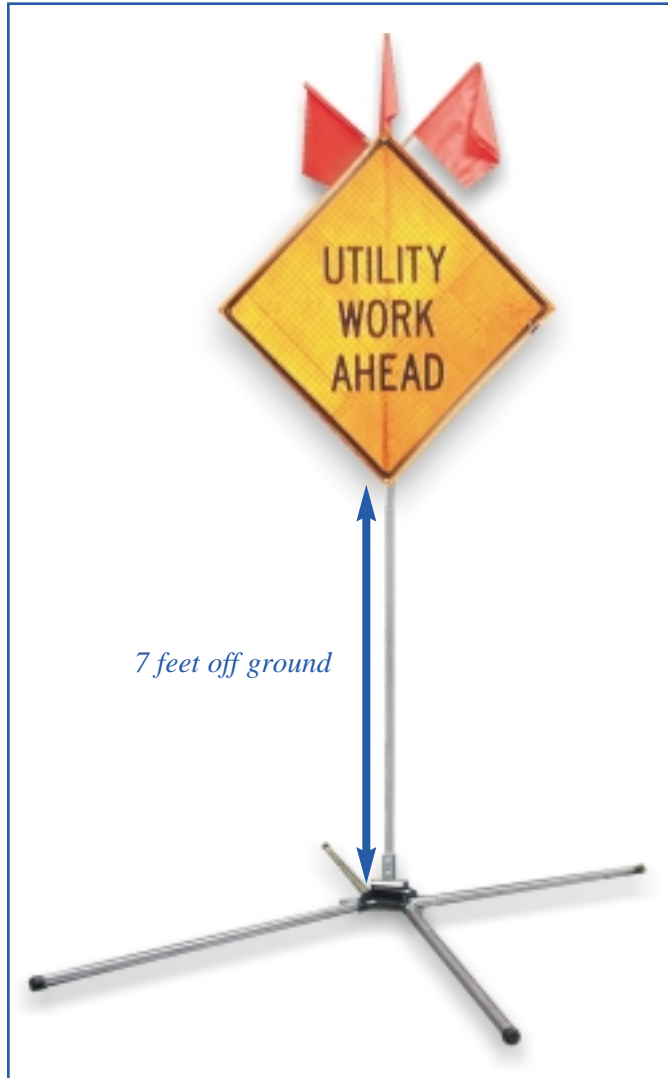

Allows the display of 48" roll-up sign panels a full 7 feet off the ground in areas where extra high display is either required or advised.

